




Optimum™ RF RF security detection system

Optimum™ RF system reduces
unauthorized removal of products
by detecting the RF tags in any direction



Optimum™ RF

RF security detection system

The Optimum RF EAS System is a system operating at 8.2 MHz. Available as a Mono or Dual System configuration, both systems share the same high-end profile design combined with quality plexiglass.

The Optimum RF offers superior detection and is ideal for retailers using RF paper labels. The Optimum Black Series are compatible with all available 8.2 MHz labels and tags.

Black Line Series

The Black Line Series treasures all the technological innovations and features of APTQ EAS Systems but with an original and stylish black look.

Advertising Booklets

Every antenna can optionally be equipped with 2 advertising booklets. Boosting in-store marketing campaigns never was this easy; advertising panels are inserted in just seconds!



Remote system management

All brand new APTQ RF systems are easily installed and tuned through software. Remote tuning capability reduces maintenance costs and downtime.

Installation

To ensure optimal functionality and safety, installation by a certified professional is required.

Benefits:

- Shrinkage reduction
- Effortless, quick setup without complexities
- Enhance security with advanced theft prevention
- Sleek aesthetics paired with top-tier detection
- Multi-color alerts for clear notifications
- Audible, distinct alarm ensuring immediate attention
- Durable and premium aluminum build for longevity
- Simplified design means fewer cables and easy installation
- High-quality electronics ensure reliable and consistent performance
- And much more!

Applications:

- Loss prevention at retail stores


Optimum™ RF

System design



Optimum™ RF

System dimensions

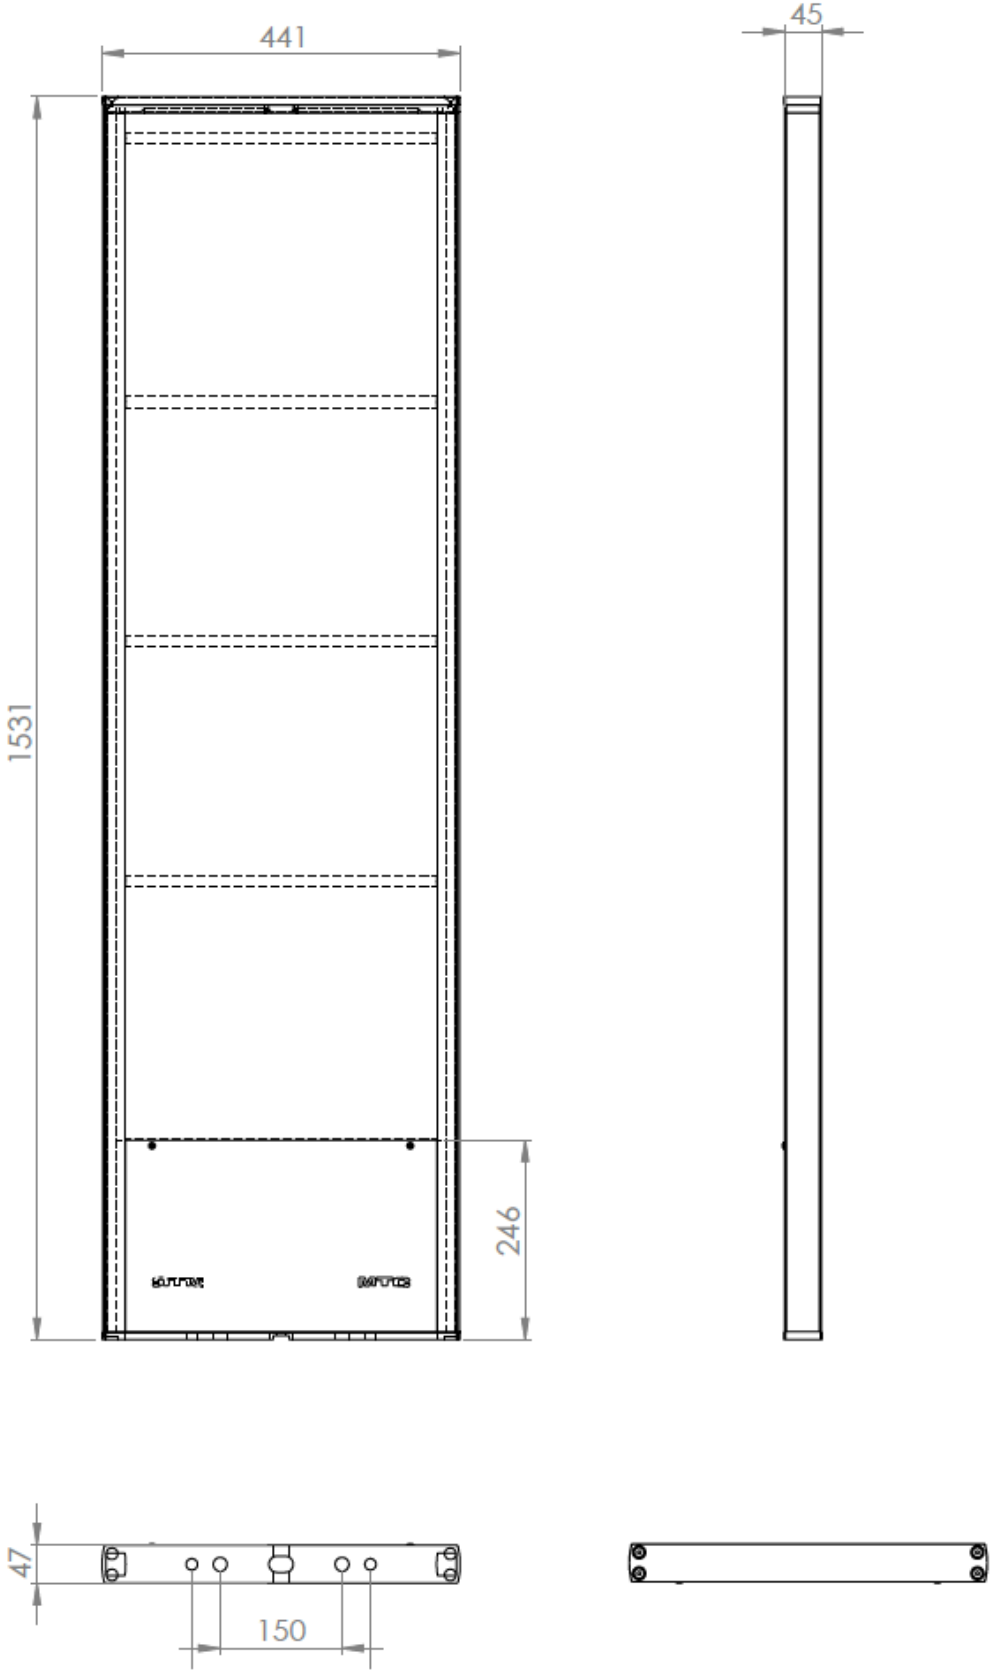

Optimum™ RF

Specifications

Features

Superior, original electronics	●	Robust aluminum profiles	●
Great design, maximum detection	●	High quality plexiglass	●
RGB alarm light	●	Automatic synchronization	●
Clear buzzer alarm sound	●	Optional integrated booster bag detection	○

● Included ○ Optional

Detection range

Hard tags Up to 1.3 m

Technical specs

Category	Brand new
Width	370 mm
Height	1530 mm
Depth	47 mm acrylic
Poster size	322 x 1258 mm
Weight	14 kg
Power	120 V (necessary power cable included)
Operating temperature	Up to 58°C / 185°F

RF specifications

Operating frequency	8.2 Mhz
Technology	Supports Mono System and Dual System configurations
Supported tags	All APTQ RF tags and various RF tag suppliers

Product reference

SKU RF-SOP-N

The Optimum RF system doesn't just detect; it deters, ensuring that your goods are always protected from theft

With over 25 years of experience, APTQ specializes in electronic systems in Canada. Our team offers a range of quality products for loss prevention, inventory management, and cross-selling. We provide the best technologies available on the market, combined with our recognized expertise in the field, to ensure an optimal experience in every respect.

1 866-659-7880
info@aptq.ca
www.aptq.ca

