




AdvanPay-120™

UHF-RFID reader for point of sale

AdvanPay-120™ efficiently deactivates the UHF-RFID tags affixed to merchandise and more



AdvanPay-120™

UHF-RFID reader for point of sale

AdvanPay-120 is a high-power RFID UHF reader that integrates:

- An antenna with a highly confined reading area
- Keyboard emulation by hardware. It's not needed to install any software at the POS.
- On-board loudspeaker
- Functionalities specifically designed to address the needs of staff at retail stores

AdvanPay-120 has 3 **operation modes**, that can be easily selected at any time:


- Payment mode (green light)
- Return mode (red light)
- Read-only mode (blue light)

AdvanPay-120 comes in **three models**:


1. Flush mount (installed recessed in a surface)



2. Under table mount (installed underneath the surface)

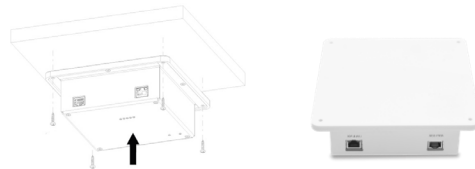

3. Desktop mount (installed on a surface)

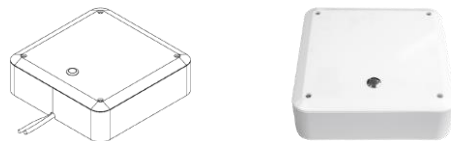

Benefits:

- Highly controlled reading area
- Automatic integration with most software applications, through hardware keyboard emulation
- Easy installation and monitoring
- For retailers:
 - Queues reduction, thanks to a much faster payment process
 - Improved customer shopping experience, derived from a shorter payment time
 - Reduction in employee costs
 - Simultaneous item detection and EAS flag activation/deactivation

Applications:

- Points of sale
- Registering at events
- Document and product tracking
- RFID programming
- Verification of tagged items

AdvanPay-120™


Specifications

Connection to AdvanCloud

RFID-Pay can be optionally connected to AdvanCloud cloud-based software platform.

The EPC codes of read RFID are reported to AdvanCloud. This information can then be analyzed for business intelligence purposes:

- Products sold
- Products returned
- Cross-selling
-

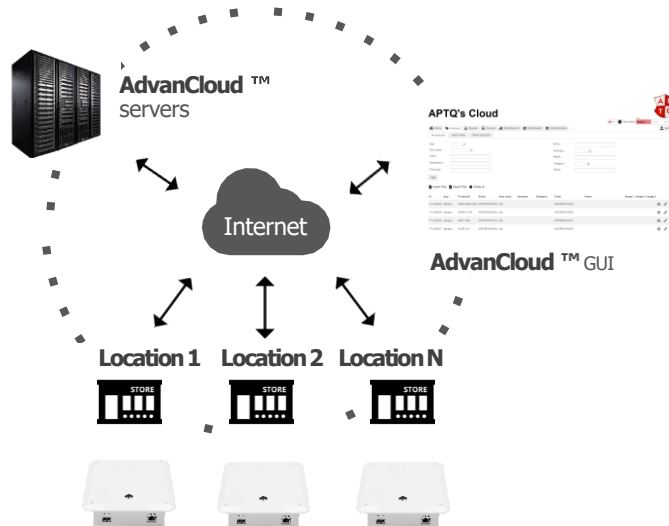

Main functionalities

- Automatically extracts the EAN13 from the EPC
- Includes hardware keyboard emulator that allows to integrate AdvanPay-120 with almost any POS software very quickly, without changing the POS software nor installing additional software in the POS.
- For retail applications, tags can be encoded with EAN13, EAS flag and a serial number
- When write mode is activated, the output power can be automatically increased, and automatically decreased after exiting write mode
- Allows to configure transmitted and write power
- Automatically sends the EPC or EAN13 to the PC

AdvanPay-120™

Specifications

Main characteristics

AdvanPay-120 has a **highly confined reading area**, even with far field RFID tags. It only reads the tags that are placed slightly above its surface, which avoids reading unwanted RFID tags.

AdvanPay-120 includes **hardware keyboard emulator** (USB Type-B connector) that allows a very easy and fast integration with point of sales applications, without having to modify such software applications.

The keyboard emulator is easily configured to send the keyboard codes required by each software application.

AdvanPay-120 is **stand alone**. It just needs to be powered with the supplied PoE injector and connected to a computer through the supplied **USB** cable.


AdvanPay-120 can be optionally connected to an Ethernet network switch. This gives AdvanPay-120 the advantages of an **Ethernet-enabled device**: remote control, centralized management, etc.

AdvanPay-120 also offers the possibility to use a USB micro Type B cable as an Ethernet point to point connectivity.

Thanks to its size and its support piece, AdvanPay-120 is the perfect choice for various applications such as point-of-sales, document tracking and RFID programming stations.

In retail stores, AdvanPay-120 reads the EPC codes of the products being purchased while simultaneously **deactivating the EAS flag** of such products, for loss prevention.

AdvanPay-120 under table mount can also be optionally connected to an **external controller** for changing the operation mode, and for turning AdvanPay-120 on and off.

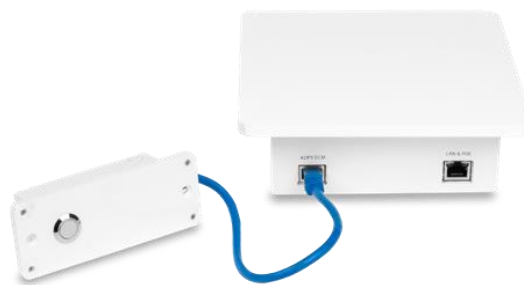

AdvanPay-120 can be used together with AdvanMat, AdvanGate or AdvanSafe-200 to provide a **complete loss prevention** system fully based on RFID UHF.

AdvanPay-120 is available in white or black color, depending on customer's needs.

AdvanPay-120™

System design



Table flush mount



Under table mount




Desktop mount


AdvanPay-120™

System dimensions

Table flush mount:

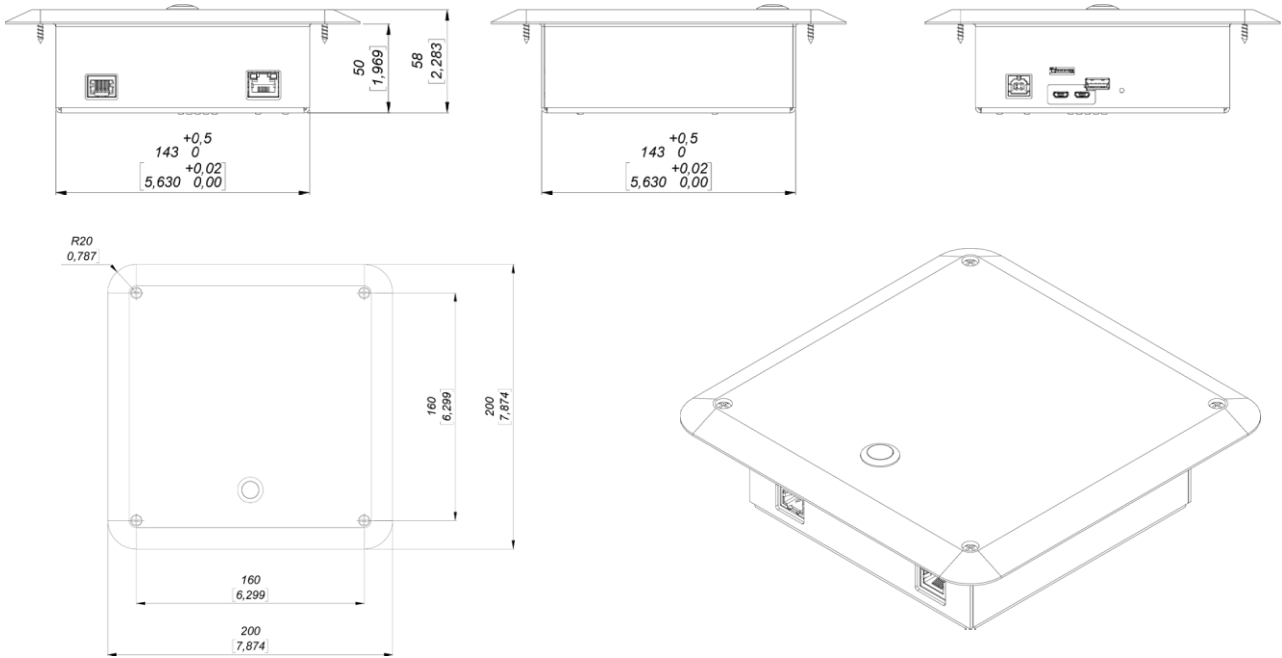

Under table mount:

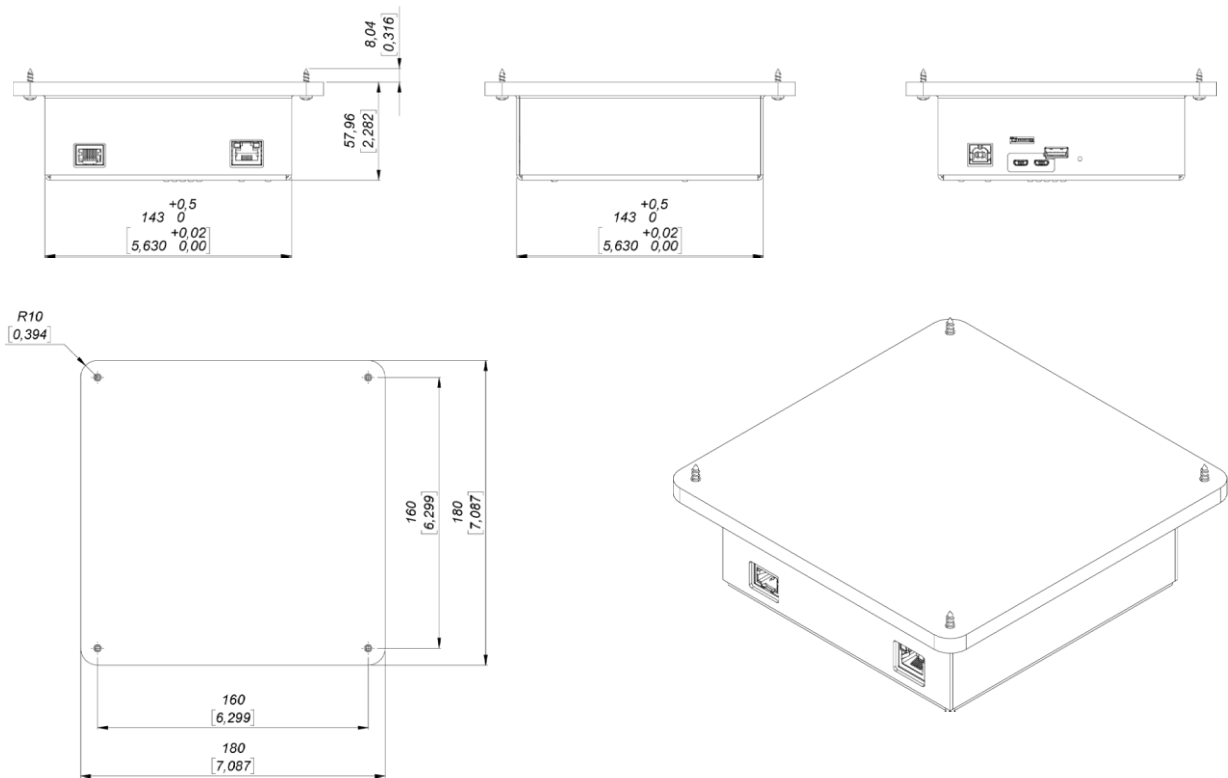


Units in millimeters and [inches]

AdvanPay-120™

System dimensions

Desktop mount:

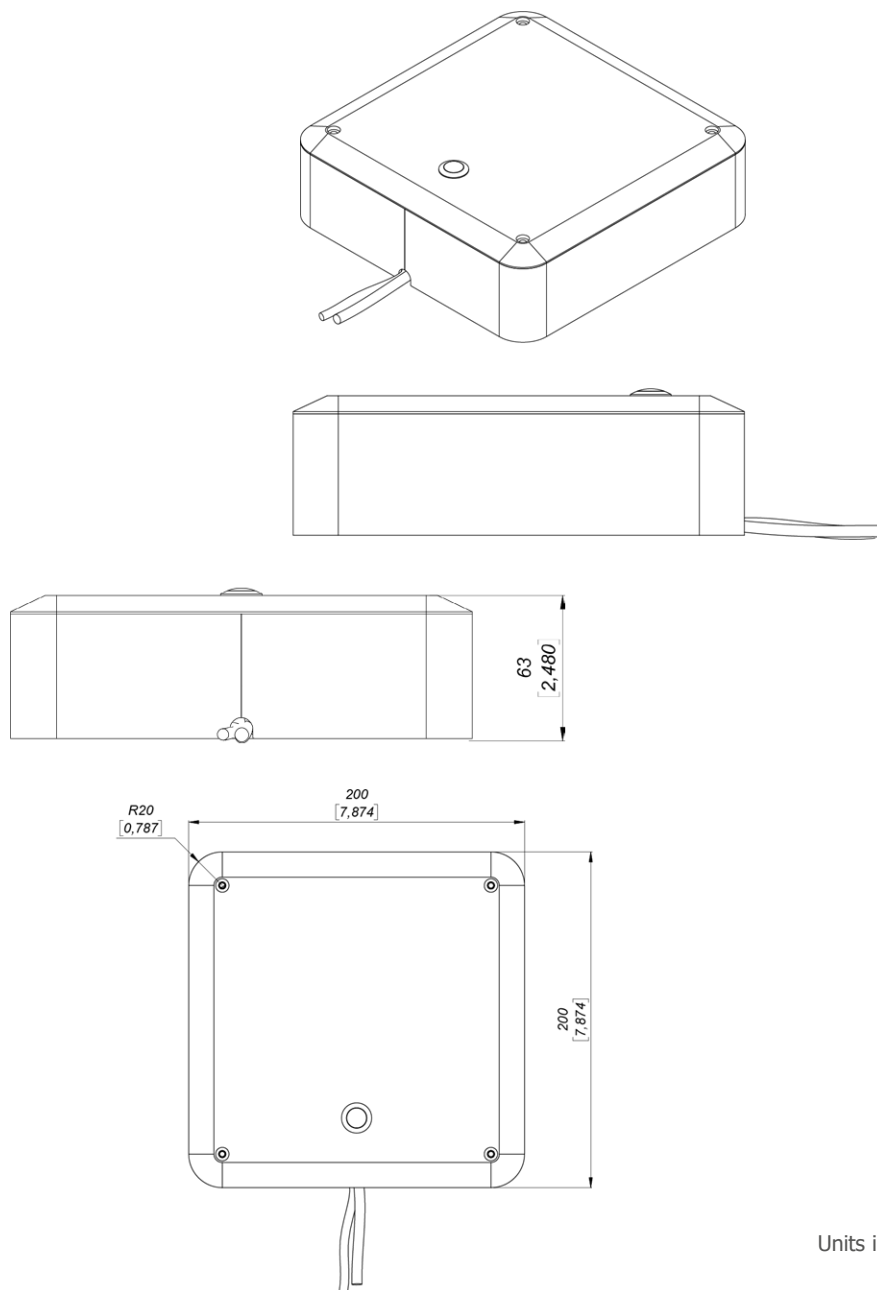

Units in millimeters and [inches]

AdvanPay-120™

Specifications

Technical specs

Air Protocol Interface	EPCglobal UHF Class 1 Gen 2 / ISO 18000-6C
Operating Frequency	FCC (NA, SA) (902 - 928) MHz ETSI (EU, IN) (865.6 - 867.6) MHz
RF Power	Programmable from 0 dBm to +27 dBm in 0.5 dBm steps
RF Antenna	Integrated circular polarized antenna. RF field is confined to avoid reading unwanted tags.
Data communications	Ethernet: IEEE 802.3 up to 100 Mbps Type B USB HID to emulate barcode reader Console USB (USB micro Type-B connector) Maintenance port Ethernet point-to-point over USB (USB micro Type-B connector)
Power supply	Power Over Ethernet (PoE) <ul style="list-style-type: none">• Supports IEEE 802.3af (Type I) and IEEE 802.3at (Type II)• Power consumption: Class 34• Isolated from Ethernet cable Ratings & Tolerances PSE Type 1: 48 V (- 4 V / +9 V) Maximum power: 15.4 W PSE Type 2: 56 V (- 6 V / +1 V) Maximum power: 30 W On-board battery for RTC chip (CR2032)
On-board actuators	Buzzer 2 Watt loudspeaker (only available in CF versions)
LED indicators	A three-color LED for indicating the active operation mode: <ul style="list-style-type: none">• Payment mode (green)• Return mode (red)• Read-only mode (blue)
Compatibility with software applications	Can be easily integrated with any application software, through keyboard wedge
Power consumption	Idle consumption < 2.5 W Default consumption (@10 dBm) < 7 W Max consumption (@27 dBm) < 9 W
Temperature range	Operating temperature -20 °C to +50 °C5 Storage temperature -30 °C to +60 °C
Dimensions (table flush mount)	200 x 200 x 62 mm (7.87 x 7.87 x 2.44 inches)
Dimensions (under table mount)	180 x 180 x 56 mm (7.09 x 7.09 x 2.20 inches)
Dimensions (desktop mount)	200 x 200 x 78 mm (7.87 x 7.87 x 3.07 inches)
Weight (table flush mount)	935 g (0.021 lb)
Weight (under table mount)	820 g (0.018 lb)
Weight (desktop mount)	1330 g (2.932 lb)
Product reference (SKU)	UHF-RFID-P120-N

With over 25 years of experience, APTQ specializes in electronic systems in Canada. Our team offers a range of quality products for loss prevention, inventory management, and cross-selling. We provide the best technologies available on the market, combined with our recognized expertise in the field, to ensure an optimal experience in every respect.

1 866-659-7880
info@aptq.ca
www.aptq.ca

